


1004-LED-150-1

150 Watt Highbay

Jobsite Lighting

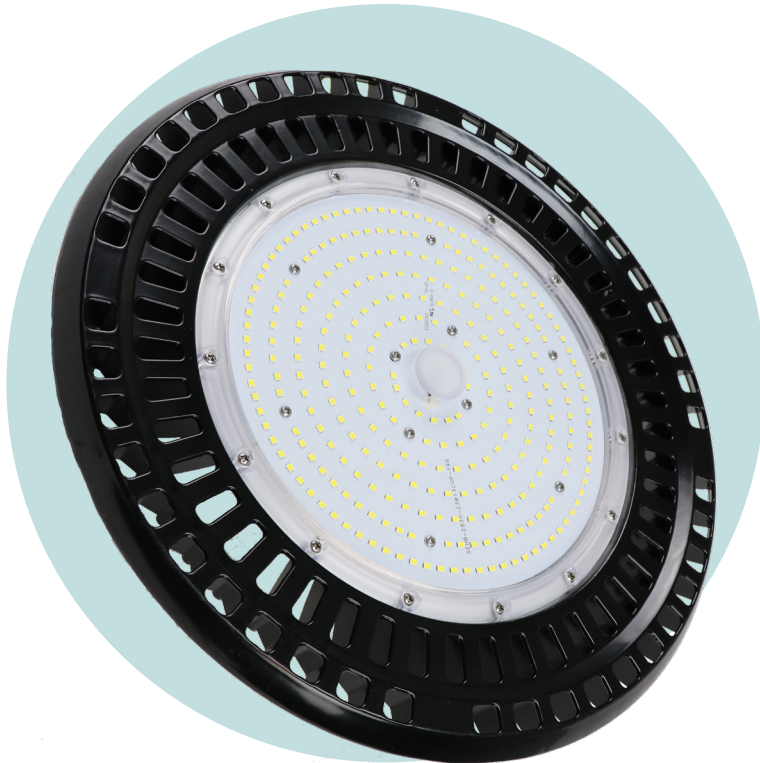

Standard Features:

- cETLus listed to UL153, CSA C22.2 No. 250.4
- Wet location rated, IP65
- UL listed
- Product DLC listed
- Dimmable, 1-10V
- Immediate full intensity output
- Energy efficient LED technology
- Reduced eye stress
- Cool, glare-free lighting
- Low power utilization/consumption
- 3-year limited warranty

Applications:

- Construction
- Emergency lighting
- Ship building
- Industrial
- Maintenance
- Tent lighting
- Utility
- Warehouse
- Data centers
- Retail locations




JOBSITE POWER PROVIDED BY: ERICSON

Unique Features:



Simple Hanging



Wet Location,
IP65 rated



50,000 Hour Life



Slim Design

Selection Guide:

Part Number	Input Voltage	Input Wattage	Power Factor	Lumens	Efficiency	CRI	Color Temperature	Beam Angle	Input Power Cord
1004-LED-150-1	100-277 VAC 50/60 Hz	150 Watts	>0.9	19,000	127 lumens/watt	>80	5000K	120°	3 ft. Blunt 18/3SJTW

NEMA Plug Configurations*

Face View	NEMA Configurations	Electrical Ratings		Perma-Tite® Outdoor Plug	Perma-Link® Indoor Plug
		Amps	Volts		
	5-15	15	125	1510-PW6P	1510-P
	6-15	15	250	1514-PW6P	1514-P
	L5-15	15	125	1520-PW6P	1520-P
	L6-15	15	250	1522-PW6P	1522-P
	L7-15	15	277	1524-PW6P	1524-P


*- Product sold separately

Photometrics:

1004-LED-150-1


Polar Candela Curves:

Vertical Plane Through:
1) 67.5 - 247.5 Horizontal
Horizontal Cone Through:
2) 5 Vertical




LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	2710.6	N.A.	14.7
FM (30-60)	5018.1	N.A.	27.1
FH (60-80)	1492.9	N.A.	8.1
FVH (80-90)	42.9	N.A.	0.2
BL (0-30)	2701.8	N.A.	14.6
BM (30-60)	4978.6	N.A.	26.9
BH (60-80)	1452.4	N.A.	7.9
BVH (80-90)	38.4	N.A.	0.2
UL (90-100)	2.8	N.A.	0.0
UH (100-180)	51.8	N.A.	0.3
Total	18490.3	N.A.	100.0
BUG Rating	B4-U3-G1		




Dimensions:

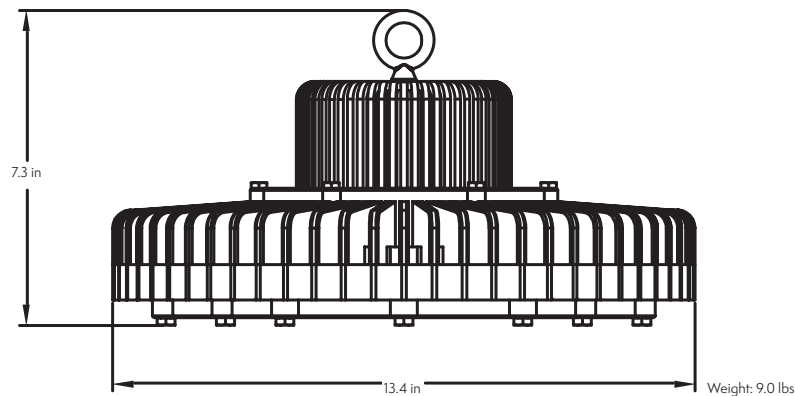

Accessories:


Part Number	Part Description
1004-LED-Hook	3/8 in. Stainless Steel Hook
1004-LED-Box	Conduit Termination Box Kit
1510-PW6P/1510-P	Watertight industrial plug or commercial grade plug options, other NEMA configurations available
PS14325-1	25ft. power stringer, indoor rated, (1) NEMA 5-15 Receptacle
PS14350-1	50ft. power stringer, indoor rated, (1) NEMA 5-15 Receptacle
PS14390-3	90ft. power stringer, indoor rated, (3) NEMA 5-15 Receptacle

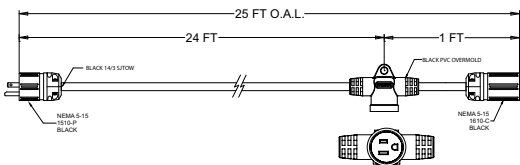

PS14325-1



1004-LED-Hook



1004-LED-Box



1510-P



1510-PW6P

Related Products:



1006



1009



1007



Ericson Manufacturing Company
4323 Hamann Parkway
Willoughby, OH 44094, USA



1-800-374-2766
info@ericson.com
L1000857A