

# HL LED Series Industrial Handlamps

## Jobsite Lighting



HL06

HL11

HL22

### Standard Features:

- High impact, shatter-proof tube with replaceable frosted tube shield
- Beam angle available in 200° and 360°
- Wired with 15A, 125V, watertight plug
- Driver range of 100-277 volts at 50/60 Hz
- Environmental rating: Suitable for outdoor use in wet locations

### Optional Features:

- Replaceable clear tube shield protector
- Handle switch available on **HL06** and **HL11** models- **Add HS**
- Other NEMA plug, configurations available
- Custom cable color and printing available
- Can be included with cable reel applications
- Contact Ericson for custom configurations

### Market Applications:


- Maintenance Task Lighting
- Confined Space Entry
- Aerospace
- Food & Beverage
- Ship Building
- Petrochemical
- Power Generation
- Mining
- Emergency Response
- Military Applications



### Unique Features:



High abuse rubber cap with steel hook.



Clear, high impact, shatter proof lens with frosted shield.



Watertight NEMA 5-15 Ericson Perma-Tite Plug .



Handle with switch available on **HL06** and **HL11**. Add-HS.


## Selection Guide:

Part Number	Lamp Size	Total Net Lumens	16/3 SOOW Yellow Cord Length	Handlamp LED Type	Beam Angle	Electric Rating	Color
HL06-16306Y-1-D*	6"	1000	6	Directional	200	120V, 0.05A, 50/60HZ	4000K
HL06-16325Y-1-D*	6"	1000	25	Directional	200	120V, 0.05A, 50/60HZ	4000K
HL06-16350Y-1-D*	6"	1000	50	Directional	200	120V, 0.05A, 50/60HZ	4000K
*For Handle and Switch, add -HS to end of part number. Available in HL06 and HL11 models.							
HL11-16306Y-1-D*	11"	1800	6	Directional	200	120V, 0.10A, 50/60HZ	4000K
HL11-16306Y-1-360*	11"	1800	6	Omni-directional	360	120V, 0.10A, 50/60HZ	4000K
HL11-16325Y-1-D*	11"	1800	25	Directional	200	120V, 0.10A, 50/60HZ	4000K
HL11-16325Y-1-360*	11"	1800	25	Omni-directional	360	120V, 0.10A, 50/60HZ	4000K
HL11-16350Y-1-D*	11"	1800	50	Directional	200	120V, 0.10A, 50/60HZ	4000K
HL11-16350Y-1-360*	11"	1800	50	Omni-directional	360	120V, 0.10A, 50/60HZ	4000K
HL22-16306Y-1-D	22"	3800	6	Directional	200	120V, 0.21A, 50/60HZ	4000K
HL22-16306Y-1-360	22"	3800	6	Omni-directional	360	120V, 0.21A, 50/60HZ	4000K
HL22-16325Y-1-D	22"	3800	25	Directional	200	120V, 0.21A, 50/60HZ	4000K
HL22-16325Y-1-360	22"	3800	25	Omni-directional	360	120V, 0.21A, 50/60HZ	4000K
HL22-16350Y-1-D	22"	3800	50	Directional	200	120V, 0.21A, 50/60HZ	4000K
HL22-16350Y-1-360	22"	3800	50	Omni-directional	360	120V, 0.21A, 50/60HZ	4000K

## Accessories:

Part Number	Description	Image Reference
910-CH	Replacement end Cap with Metallic Hook	A
TS-XX**-F	Protective Frosted Tube Shield Lens Cover 4-Pack	B
TS-XX**	Protective Clear Tube Shield Lens Cover 4-Pack	B
MOUNT-MAG-CLAMP	Mount Magnet 2-Pack with Tube Clamp	C
MOUNT-MAG-HOOK	Mount Magnet 2-Pack with Tube Clamp with Hookeye	D
MOUNT-MAG-STRAP	Mount Magnet 2-Pack with 8" Velcro Strap	E
MOUNT-STRAP-18	Mount Velcro Strap 2-Pack 18x3/4" Black 2-Pack	F
RFID-TAG-C-10	RFID Cord Tag 10-Pack Kit	-

\*\* For TS-XX Series insert 14 for HL06, HL11 and 24 for HL22.

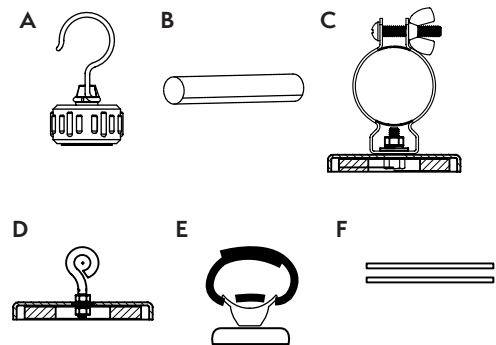

Ericson Manufacturing Company  
4323 Hamann Parkway  
Willoughby, OH 44094, USA



1-800-374-2766  
info@ericson.com  
L1000850-A